



Traditional
Fireplace
Design Collection





SHOW YOURSELF

Create a room that begs you to stick around, *sit down and relax*.

IN

FEATURED Montebello DLX 45 shown with Buff Herringbone Ceramic Fiber Liners, Split Oak Log Set and Mission Style Andirons



FEATURED Montebello DLX with Red Rustic Ceramic Fiber Liners and Split Oak Log Set

The Montebello DLX Direct Vent Gas Fireplace presents a traditional design with expansive ceramic glass opening for a true masonry appearance. With its flush hearth floor design, tall dancing yellow flames and exceptional viewing area, the Montebello DLX provides endless possibilities for making your living area warm and inviting.

EXCLUSIVE FEATURES

- Available in 40" and 45" models
- Gas controls are conveniently hidden to the side of the fireplace opening for easy installation and finishing
- Electronic ignition with battery backup to provide continued operation in the event of a power outage
- Exclusive burner design to generate amazing tall flame
- Flush hearth floor design
- Six flame settings for precise control
- Smooth-faced design features ceramic glass for optimum heat transfer and 2015 ANSI barrier compliant
- Premium, high definition rustic Split Oak fiber log set with beautiful glowing ember bed
- Heavy duty log grate
- Interior liner selections consist of full three-piece black reflective porcelain or ceramic fiber
- Full function remote control (Flame, IPI/CPI)
- Available in dedicated power-vent models (Natural Gas only)
- Limited Lifetime Warranty



FEATURED Montebello DLX and its impressively large flame presentation.

Options

INTERIOR (REQUIRED)

Choose from five distinctive fireplace liners that deliver the true look of artisanal craftsmanship.



Buff Rustic



 $Buff\ Herringbone$



Red Rustic



Red Herringbone



Black Reflective Porcelain

ANDIRONS (OPTIONAL)

Total Comfort Control



Proflame II Remote included



Classic Style



Mission Style

SCREENS (OPTIONAL) Choose a free-standing decorative screen to create a decorative barrier to prevent direct contact with hot glass.



Dual Arch Screen




Arch Screen



Classic Screen


FLAT WALL FRAMING SPECIFICATIONS



MONTEBELLO DLX 40 MONTEBELLO DLX 45

| A | 50-3/4" | 56-7/8" |
|---|---------|---------|
| В | 45" | 50" |
| C | 26" | 26" |

CORNER FRAMING SPECIFICATIONS



| | MONTEBLLEO DEX 40 | MONTEBELLO DEX 43 |
|---|-------------------|-------------------|
| D | 50-5/8" | 56-3/4" |
| E | 83-5/8" | 89-7/8" |
| F | 41-7/8" | 44-7/8" |
| G | 59-1/8" | 63-1/2" |


IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

APPLIANCE SPECIFICATIONS

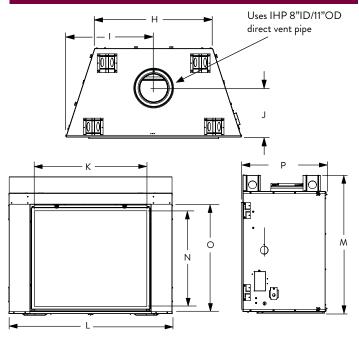

| | MONTEBELLO DLX 40 | MONTEBELLO DLX 45 |
|---|-------------------|-------------------|
| Н | 34" | 40-1/8" |
| I | 25-5/16" | 28-3/8" |
| J | 14-1/8" | 14-1/8" |
| K | 34-3/4" | 40-59/64" |
| L | 50-5/8" | 56-11/16" |
| M | 45" | 50" |
| N | 29-9/32" | 34-1/2" |
| 0 | 33-3/32" | 38-3/32" |
| P | 26-15/32" | 26-15/32" |

| FIREPLACE EFFICIENCIES — Listed to ANSI Z21.50 as a decorative gas appliance. | | | | | |
|---|------|---------------|---------------|--|--|
| MODEL | FUEL | BTU/HR | P4/ENERGUIDE* | | |
| MONTEBELLO DLX 40 TEN | NG | 32,000/50,000 | 35.8% | | |
| MONTEBELLO DLX 40 TEP | LP | 32,000/50,000 | 42.0% | | |
| MONTEBELLO DLX 40 TYN | NG | 26,500/42,000 | 47.0% | | |
| MONTEBELLO DLX 45 TEN | NG | 40,000/57,000 | 47.2% | | |
| MONTEBELLO DLX 45 TEP | LP | 43,000/56,000 | 47.0% | | |
| MONTEBELLO DLX 45 TYN | NG | 35,000/48,000 | 47.2% | | |

^{*}Intermittent ignition systems. Millivolt/Electronic.



 $\label{proved} Approved for use with European Copper and Chimney Classics chimney tops, which improve performance and add an elegant touch.$



© 2015 Innovative Hearth Products 785617M 03/15



Astria.us.com





